

**PRODUCT DATA SHEET**
**■ Introduction**

The Hospi-Gard® IsoClean® is a portable, self-contained high efficiency particulate air (HEPA) filtration system designed to easily and economically create a negative pressure isolation room/environment that will meet OSHA and CDC TB guidelines.

The IsoClean® can be used as a positive pressure clean air recirculating system in clinics, waiting rooms, hospital emergency rooms and other confined areas or as a partial or complete exhausting system to create a negative pressure isolation room for possible use with patients known or suspected of having TB, SARS or other infectious diseases.

As a recirculating unit, the IsoClean®'s powerful motor/blower can deliver from 560 CFM (951 m<sup>3</sup>/hr) up to 800 CFM (1359 m<sup>3</sup>/hr) to provide a large number of room air changes per hour to minimize the spread of airborne diseases to patients and health care workers.

As a negative pressure unit, the air passing through the HEPA filter is cleansed of 99.99% of particles as small as 0.3 micron and may be exhausted directly to the exterior through a window, or through a wall simply by connecting flexible ducting to the 6 in. (152 mm) collar located on the top of the IsoClean®.

The Hospi-Gard® IsoClean® filter contains 220 square feet (20.4 square meters) of media to extend its usable lifetime before filter loading occurs, resulting in decreased cost and fewer filter changes.

**■ Standard Features**
**Low Cost Isolation Room**

An easy and economical solution for creating a negative pressure, isolation room. Simply roll the IsoClean® into a standard room, connect flexible ducting to the 6 in. (152 mm) collar on the top of the unit for partial exhaust or to the optional 8 in. (204 mm) flanged collar for total exhaust and vent the purified air to the exterior through a window or wall.

**Flexible Applications**

The versatile IsoClean® can be used as a clean air recirculating unit, a negative pressure unit or as a split system to create both negative pressure and clean air recirculation by simultaneously exhausting some of the air out while recirculating the remainder back into the room.

**Small and Portable**

The IsoClean® can be rolled from one room to another and easily fits into areas with limited floor space.

**Quiet Operation**

52 dBA on low, 56 dBA on medium and 60 dBA on high speed measured 30 in. (762 mm) from face of the unit.

**3-Speed Adjustable Airflow**

The IsoClean® provides effective air filtration for a wide variety of room sizes with speeds ranging from 560 to 800 CFM (951-1359 m<sup>3</sup>/hr).

**Room Air Changes Per Hour**

Provides up to 24 room air changes per hour (ACH) in a typical 18 x 12 x 8 ft (5.5 x 3.7 x 2.4 m) patient room or up to 12 ACH for rooms up to 3,900 cubic feet (100 cubic meters).

**Low-High Clean Air Circulation Pattern**

Room air, along with airborne contaminants, is drawn into the intake grille at the bottom while the purified air is discharged at a high velocity from the exhaust grille located at the top of the IsoClean® to generate a sweeping, low-to high air circulation pattern with adequate "reach" to optimize the clean breathing zone for patient and staff.

**Simple Maintenance**

Both HEPA filter and prefilter are easily accessible for replacement by authorized personnel.


**■ Options**

- » IsoClean with ULPA Filter Upgrade
- » Minihelic Pressure Gauge
- » Keylock ON/OFF Switch
- » Anti-Microbial Prefilter
- » Carbon Prefilter
- » 8 in. (203 mm) 100% Exhaust Collar
- » Room Pressure Monitor
- » Annunciator
- » 220 V, 50/60 Hz Unit Available
- » UV-C Sanitizer Available

**■ Hospital Applications**

- » Negative Pressure Rooms
- » Emergency Rooms
- » Waiting Rooms
- » Sputum Induction
- » Aerosol Pentamidine Treatment
- » Intensive Care Units
- » Bronchoscopy Rooms
- » Renal Dialysis Rooms

**■ Other Applications**


- » Clinics
- » Nursing Centers
- » Physician Offices
- » Homeless Shelters
- » Addiction Recovery Centers
- » Correctional Facilities

**■ Warranty**

- » Limited 1-year warranty

PRODUCT DATA SHEET

■ Dimensional Information

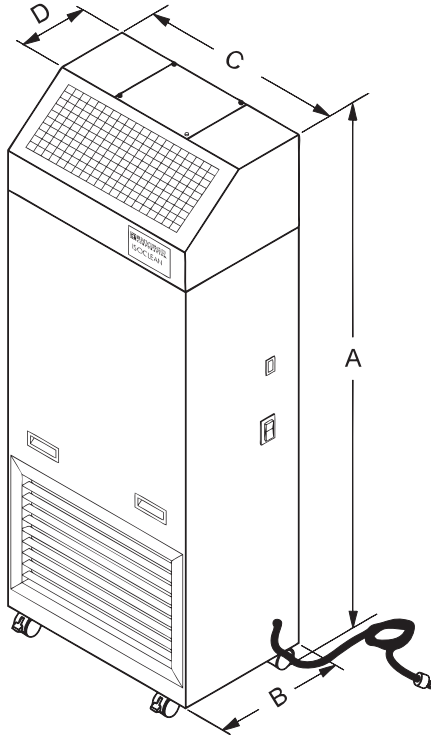

Description		120V with UV	220V with UV	120V	220V
Part No.		10850-005	10921-004	10850	10921
Dimension Inches (mm)	A	62.25 (1581)			
	B	19.75 (502)		15.75 (400)	
	C	23.66 (601)			
	D	12.86 (327)		8.86 (225)	
UL Listed (E152685)		No	No	Yes	No
Airflow CFM (m³/hr)		Low: 560 (951) ± 10%			
		Medium: 690 (1172) ± 10%			
		High: 800 (1359) ± 10%			
Power Requirements		8 Amps @ 115V/ 60 Hz	4.0 Amps @ 208-230V/ 60 Hz	6.9 Amps @ 115 vac/ 60 Hz	3.5 Amps 208-230 vac/ 60 Hz
Unit Weight lbs. (kg.)		200 (91)		175 (79)	
Shipping Weight lbs. (kg.)		285 (129)		250 (113)	
Shipping Dimensions (mm)	A	71.5 (1816)			
	B	22.75 (578)		18.75 (476)	
	C	26.75 (680)			

\* Note: Airflow reduced by 20% when running 50Hz.

■ Specifications

**Construction**

Welded steel filter plenum and blower housing with a corrosion resistant polyurethane enamel finish. Four 2" (51 mm) casters, two locking.

**Filter**

Aluminum Framed HEPA type, with a minimum efficiency of 99.99% @ 0.3 micron, aerosol challenged. Airflow sensor indicates when the filter needs changing.

**Prefilter**

Disposable non-woven polyester media with frame - 30% ASHRAE.

**6 in. (152 mm) Exhaust Port**

Located on top of the unit for use as a split system to create both negative pressure and clean air recirculation.

**Motor/Blower Assembly**

Direct drive, continuous duty, 1/3 Hp, 0.25 kW, 3-speed motor with sealed-for-life bearings and inherent overload protection located on the "clean side" of the filter. Motor/blower assembly is mounted on vibration dampening rubber mounts and designed to provide rated airflow through a 50% increase in initial static pressure.

**Electrical**

Standard 5-15P, 115 V, single phase, rubber-covered cord with 3-prong hospital grade, grounded plug (120V Model). Standard 6-15P, 220 V, single phase, rubber-covered cord with 3-prong hospital grade, grounded plug (220V Model).

**UL Listing**

UL 507 E152685 on Standard Unit (Part No. 10850) only.