
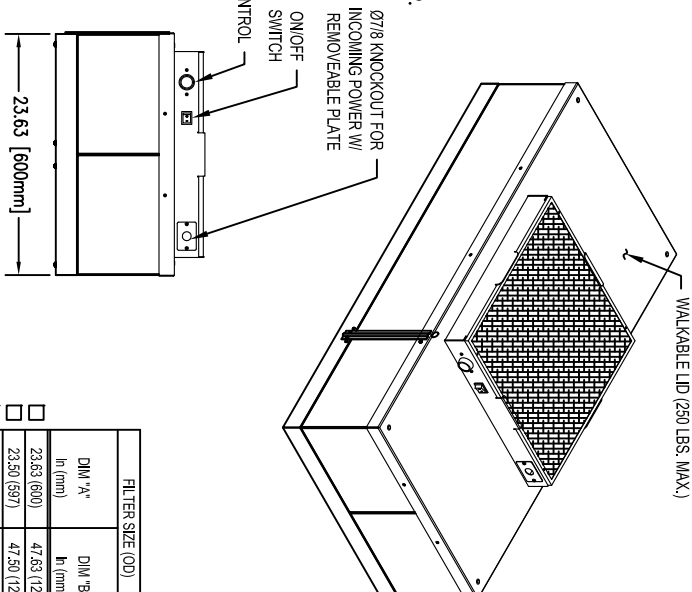



- HOUSING STYLE:
 - RSRE - FILTER BAFFLE AND MOTOR ROOMSIDE REMOVABLE
- MOTOR: THREE SPEED BACKWARD INCLINED MOTOR/BLOWER
 - 115V/ 60 Hz, 1 PHASE, 1.80 FLA
 - 230V/ 60 Hz, 1 PHASE, 0.98 FLA
 - 277V/ 60 Hz, 1 PHASE, 0.80 FLA
- FILTER:
 - HEPA 99.99% @ 0.3 MICRON UL 900 (STANDARD)
 - ULPA 99.9995% @ 0.12 MICRON (U15) UL 900
 - PTFE
 - OTHER _____
- CONTROL:
 - SOLID STATE SPEED CONTROL (SC) (STANDARD)
 - REMOTE MOUNTED SPEED CONTROL (SCS1)
 - NETWORK CONTROL CARD (EMC)
- HOUSING FINISH:
 - MIL FINISH ALUMINUM (STANDARD)
 - POWER COAT PAINT (WHITE)
 - 304 STAINLESS STEEL (ADD 3/8" TO OVERALL HEIGHT)
- SCREEN FINISH:
 - ANODIZED ALUMINUM (STANDARD)
 - POWER COAT PAINT (WHITE)
 - 304 STAINLESS STEEL
- OPTIONS:
 - 10" (254 mm) ALUM. DUCT COLLAR (11231-001 SHIPPED LOOSE)
 - 12" (305 mm) ALUM. DUCT COLLAR (11231-002 SHIPPED LOOSE)
 - 14" (356 mm) ALUM. DUCT COLLAR (11231-003 SHIPPED LOOSE)
 - POWER CORD - 115V ONLY (SHIPPED LOOSE) (NOT ACCEPTABLE FOR PLENUM APPLICATIONS)
 - IL - "GREEN" INDICATOR LIGHT (ON = MOTOR RUNNING, OFF = MOTOR FAILURE) (ON = TIME TO CHANGE FILTER)
 - IL-SPSS - "RED" FILTER LOAD INDICATOR LIGHT (ON = TIME TO CHANGE FILTER)
 - CPRXZ - (1) 1/8" FNPT ROOMSIDE CHALLENGE PORT AND (1) 1/8" FNPT STATIC CONCENTRATION PORT
 - 20 x 20 x 2" (50.8 mm) PLEATED PRE-FILTER G-4 (SHIPS LOOSE)
 - 0-10V OUTPUT SIGNAL WITH PRESSURE TRANSDUCER FOR CONTINUOUS FILTER MONITORING.
 - 3/4" KNIFE EDGE FOR CEILING GRID WITH GEL SEAL (ADD 3/4" TO OVERALL HEIGHT)
 - CERTIFICATION:
 - UL 507 LISTED (E162886)

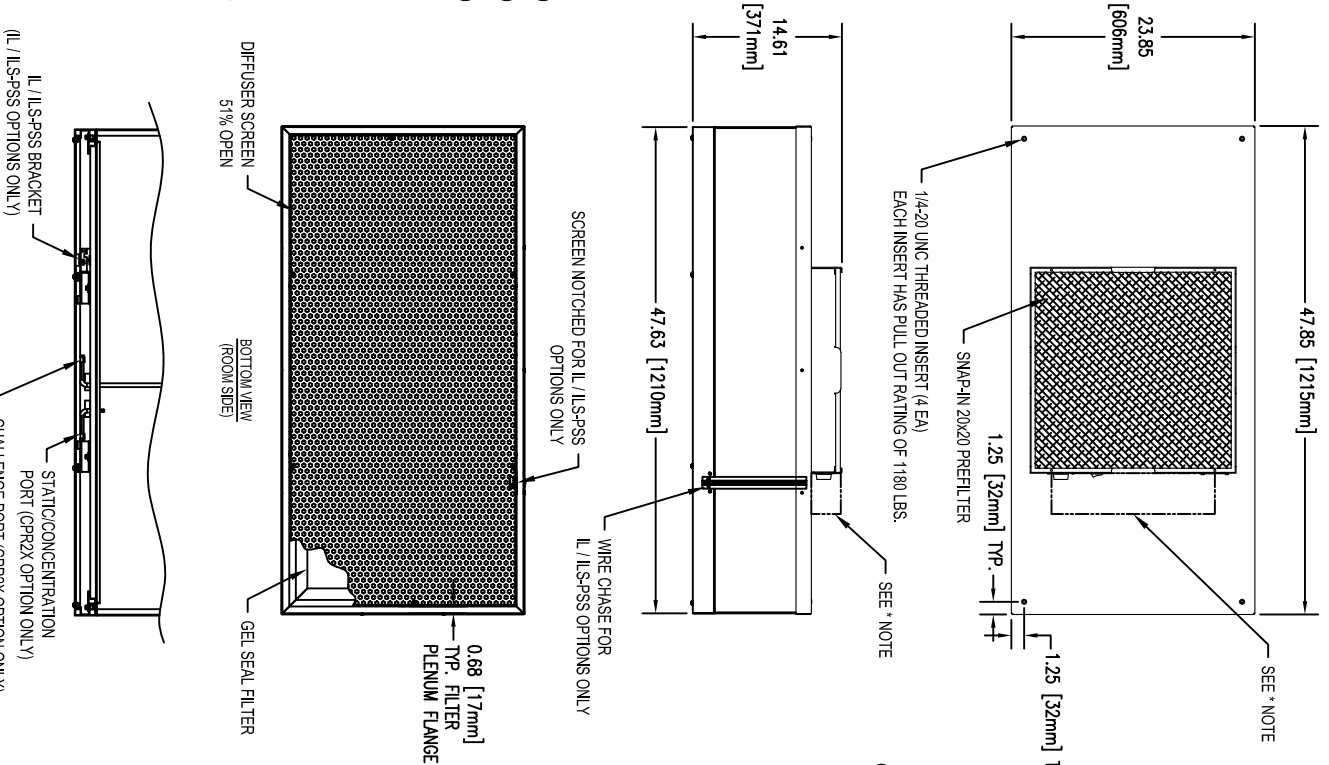

FILTER SIZE (OD)		NOMINAL FILTER SIZE	APPROX WEIGHT
DM "A" H (mm)	DM "B" H (mm)		
<input type="checkbox"/>	23.63 (600)	47.63 (1210)	(ALUM.) 61 lbs
<input type="checkbox"/>	23.50 (597)	47.50 (1207)	28 kgs
<input type="checkbox"/>	23.26 (591)	47.26 (1200)	(SST) 28 kgs
<input type="checkbox"/>	23.13 (588)	47.13 (1197)	(SST) 69 lbs
<input type="checkbox"/>	23.00 (584)	47.00 (1194)	31 kgs
<input type="checkbox"/>	23.03 (585)	46.63 (1188)	
<input type="checkbox"/>	23.63 (600)	41.63 (1057)	(ALUM.) 57 lbs
<input type="checkbox"/>	23.50 (597)	41.50 (1054)	26 kgs
<input type="checkbox"/>	23.26 (591)	41.26 (1046)	(SST) 24 kgs
<input type="checkbox"/>	23.13 (588)	41.13 (1046)	(SST) 64 lbs
<input type="checkbox"/>	23.00 (584)	41.00 (1041)	29 kgs
<input type="checkbox"/>	23.03 (585)	40.75 (1038)	
<input type="checkbox"/>	23.63 (600)	35.63 (905)	(ALUM.) 53 lbs
<input type="checkbox"/>	23.50 (597)	35.50 (902)	24 kgs
<input type="checkbox"/>	23.26 (591)	35.26 (895)	(SST) 60 lbs
<input type="checkbox"/>	23.13 (588)	35.13 (892)	(SST) 27 kgs
<input type="checkbox"/>	23.00 (584)	35.00 (889)	
<input type="checkbox"/>	23.03 (585)	34.84 (889)	
<input type="checkbox"/>	23.63 (600)	23.63 (600)	(ALUM.) 42 lbs
<input type="checkbox"/>	23.50 (597)	23.50 (597)	19 kgs
<input type="checkbox"/>	23.26 (591)	23.26 (591)	(SST) 48 lbs
<input type="checkbox"/>	23.13 (588)	23.13 (588)	(SST) 22 kgs
<input type="checkbox"/>	23.00 (584)	23.00 (584)	
<input type="checkbox"/>	23.03 (585)	23.03 (585)	

** CONTACT MFG. TO INSURE SIZE AVAILABILITY.

SIGNATURE _____

DATE _____

COMPANY _____

PROJECT _____

P.O. _____

ENVIRGO
Innovators in clean technology

101 Michael Rd.
Santid NC 27330
PHONE: 919-775-2201
PHONE: 1-800-884-0002
FAX: 1-800-456-2379
www.envirgo.com
email: envirgo@envirgo.com

MAC10 LEAC2
RSRE

UNLESS SPECIFIED, ALL DIMENSIONS ARE IN INCHES. TOLERANCE: .XX4.03 .XX4.015 ANGULAR ±1° UNLESS NOTED

THIS DRAWING IS THE PROPERTY OF ENVIRGO, AND MAY NOT BE REPRODUCED OR PUBLISHED WITHOUT AUTHORIZATION FROM ENVIRGO.

COPYRIGHT 2010 ENVIRGO

DRAWING NO: 8000016

DATE: 12-16-14

REV: ~

DESIGNER: _____

REVIEWER: _____

DATE: _____

BY: _____

CONTRACT NO: ECN-52088A