

MOTOR: THREE SPEED BACKWARD INCLINED MOTOR/BLOWER

- 115V, 50/60 Hz, 1 PHASE, 2.26 FLA
- 208-240V, 50/60 Hz, 1 PHASE, 1.4 FLA
- 277V, 60 Hz, 1 PHASE, 1.17 FLA

FILTER:

- HEPA 99.99% @ 0.3 MICRON UL 900 (STANDARD)
- UL PA 89.9995% @ 0.12 MICRON (U15) UL 900
- PTFE
- OTHER _____

CONTROL:

- THREE SPEED SWITCH (SPS)

HOUSING FINISH:





- MIL FINISH ALUMINUM (STANDARD)
- POWER COAT PAINT (WHITE)
- 304 STAINLESS STEEL (ADD 3/8" TO OVERALL HEIGHT)

OPTIONS:

- 10" (254 mm) ALUM. DUCT COLLAR (11231-401 SHIPPED LOOSE)
- 12" (305 mm) ALUM. DUCT COLLAR (11231-402 SHIPPED LOOSE)
- 14" (355 mm) ALUM. DUCT COLLAR (11231-403 SHIPPED LOOSE)
- POWER CORD - 115V ONLY (SHIPPED LOOSE) (NOT ACCEPTABLE FOR PLENUM APPLICATIONS)
- IL - "GREEN" INDICATOR LIGHT (ON = MOTOR RUNNING; OFF = MOTOR FAILURE)
- ILS-SPS - "RED" FILTER LOAD INDICATOR LIGHT (ON = TIME TO CHANGE FILTER)
- CPRX2 - (1) 3/8" ROOMSIDE CHALLENGE PORT AND (1) 3/8" STATIC CONCENTRATION PORT
- 20 x 20 x 2" (50.8 mm) PLEATED PRE-FILTER G-4 (SHIPS LOOSE)
- O-10V OUTPUT SIGNAL WITH PRESSURE TRANSMITTER FOR CONTINUOUS FILTER MONITORING.
- 3/4" KNIFE EDGE FOR CEILING GRID WITH GEL SEAL (ADD 3/4" TO OVERALL HEIGHT)

CERTIFICATION:

- UL 507 LISTED (E152885)
- CE CERTIFIED

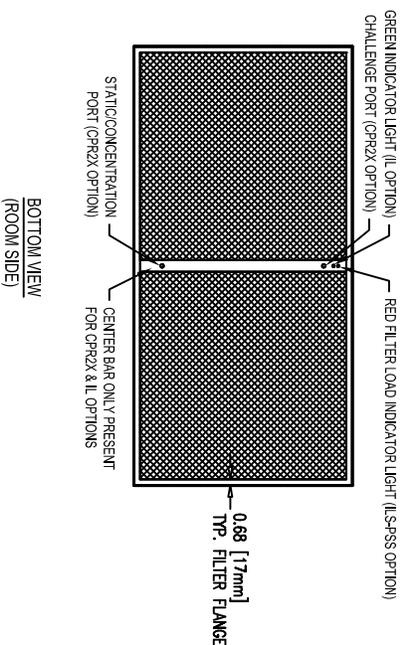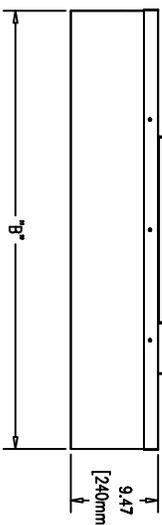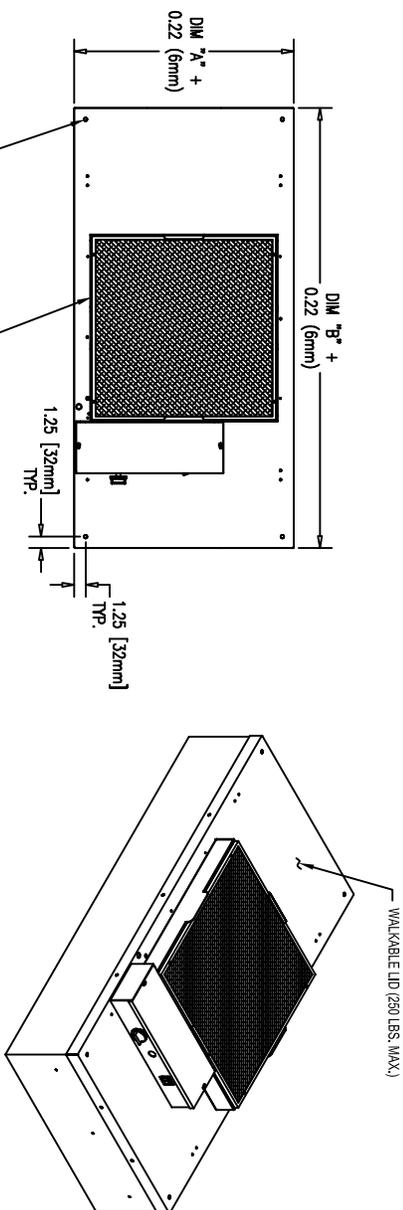

FILTER SIZE (OD)	DIM 'A' in (mm)	DIM 'B' in (mm)	NOMINAL FILTER SIZE	APPROX. WEIGHT
<input type="checkbox"/>	23.63 (600)	47.63 (1210)		(ALUM.) 66 lbs
<input type="checkbox"/>	23.50 (597)	47.50 (1207)		30 Kgs
<input type="checkbox"/>	23.25 (591)	47.25 (1200)	2X4	(SST) 76 lbs
<input type="checkbox"/>	23.13 (588)	47.13 (1197)		
<input type="checkbox"/>	23.00 (584)	47.00 (1194)		
<input type="checkbox"/>	23.03 (585)	46.63 (1185)		35 Kgs
<input type="checkbox"/>			**OTHER	N/A

** CONTACT MFG. TO INSURE SIZE AVAILABILITY.

SIGNATURE _____
 DATE _____
 COMPANY _____
 PROJECT _____
 P.O. _____

MAC10 LEAC STANDARD

101 Mitchell Rd.
 Sanford, NC 27330
 PHONE: 919-775-2201
 PHONE: 1-800-884-0002
 FAX: 1-800-456-2379
 www.enviroco.com
 email: enviroco@enviroco.com



UNLESS SPECIFIED, ALL DIMENSIONS ARE IN INCHES. TOLERANCE: XX.03 .XXX.015 ANGULAR ±1° UNLESS NOTED

THIS DRAWING IS THE PROPERTY OF ENVIRCO, AND MAY NOT BE REPRODUCED OR PUBLISHED WITHOUT AUTHORIZATION FROM ENVIRCO.

DRAWING NO: 8000004
 DATE: 7-17-12
 DESIGNED BY: _____
 DRAWN BY: _____
 APPROVED BY: _____
 DATE: _____
 CON-51462



COPYRIGHT 2010 ENVIRCO